

5th Wheel and Hydraulic System

5th wheel	SAF/Holland 70,000 lb semi-oscillating 16 inch lift	<i>(optional SAF/Holland 100,000 lb available)</i>
Hydraulic lift cylinders	(2) 5 inch 50,000 lb capacity	
Hydraulic tank	15 gallon steel tank w/ sight glass	
Pump	Engine mounted	

Trailer Equipment

Air connections	12 ft color coded coiled w/ glad-hands	<i>(optional break-away glad-hands available)</i>
7-way electric cable receptacle		
7-way electric cable	12 ft coiled detachable	

Tires and Wheels

Front tires	11R22.5 LRG
Front wheels	Steel 22.5 x 8.25 hub piloted, 285mm BC
Rear tires	11R22.5 LRG
Rear wheels	Steel 22.5 x 8.25 hub piloted, 285mm BC

Electrical System

Electrical System	12V, negative ground	
Alternator	Delco Remy 22SI 130AMP	
Starter	Denso 12V	
Batteries	2 group 31 1900 CCA (min)	
Circuit protection	Automatic circuit breakers	
Windshield wipers	Single electric (pantograph) overhead	
Backup alarm	Non-motion detecting	<i>(optional motion detecting available)</i>
Horn	Single	

Lighting

Headlamps	Low/high sealed beam
Backup light, stop and turn signals	Shock resistant mounting
BOC 5th wheel light	Shock resistant mounting

Cab and Equipment

Cab construction	• Electrocoated (e-coated) steel, full cab immersion •	
Cab dimensions (outside)	Raised roof, 52" wide x 71" deep (w/o rear door) x 78" high (deck to roof)	
Cab doors	Left side hinged door w/ manual crank window, sliding rear door	
Rear door opening (useable)	24" wide x 72" high	
Cab floor	Sweep out floor w/ durable mat	
Cab dash	Steel wrap around	
Overhead console		
Cab mounting	4 point, rear air	
Cab tilt	Electric over hydraulic	
Glass	Tinted	
Mirrors	Dual SST west coast mirrors	<i>(optional convex, heated available)</i>
Cab climate control system	44,000 BTU fresh air heater	<i>(optional A/C available)</i>
Steering column	Fixed	
Steering wheel	16 inch 3-spoke	
Seat	Bostrom Baja mid-back air suspension	<i>(optional Bostrom T915 mid-back available)</i>
Seat covering	Black Cordura Plus® cloth fabric	
Seat belt	3-point black	<i>(optional 3-point orange available)</i>
Dome light		
Power ports	(2) 12V	<i>(optional (1) cigar lighter/(1) 12V available)</i>
Air horns	Mounted under cab	
Translucent sun visor(s)	Dual	
Conspicuity tape		

Operators Controls

Park brake - push/pull
Headlamps
Turn signal - column mounted
Brake pedal
Accelerator pedal
5th wheel height control
5th wheel lock
Transmission gear selector - T handle

Cab Instrumentation

Speedometer
Tachometer
Engine oil pressure
Coolant temperature
Transmission oil temperature
Voltmeter
Fuel level
Primary (A) air pressure
Secondary (B) air pressure
Hour meter (included in tachometer)

Cab Warning Devices

Park brake
High beam
Turn signal
Low fuel
Low air
Seat belt
DPF
HEST

Paint

Cab	White	(optional customer specific colors available)
Chassis	Black	(optional customer specific colors available)
Bumper	Black	(optional customer specific colors available)
Wheels	White powder coat	(optional customer specific colors available)

Optional Equipment

Air Dryer	Glad-hand and 7-way cable storage	Upper side windows (above LH door & RH slider)
Fuel/water separator	Battery disconnect switch	Skylight window in roof
Engine block heater	Air restriction indicator	Cab fan
Oil pan heater	Amber beacon light	AM/FM radio/CD w/ aux input, speakers & antenna
Beavertail	Spot/work/flood lights	5# ABC fire extinguisher
Rear flexible fenders		Additional instrumentation
Trailer stops/full cab guard		


Vehicle Ratings

Vehicle tare weight, front	
Vehicle tare weight, rear	
GAWF	13,200 lbs
GAWR	23,000 lbs
GCW	80,000 lbs

Performance

Basic Warranties (Industry Best)

Autocar terminal tractor	1 year or 3,000 hours whichever occurs first, parts & labor
Cummins engine	2 years parts & labor
Dana axles	3 years parts & labor
Allison transmission	4 years parts & labor
Frame	7 years or 20,000 hours whichever occurs first

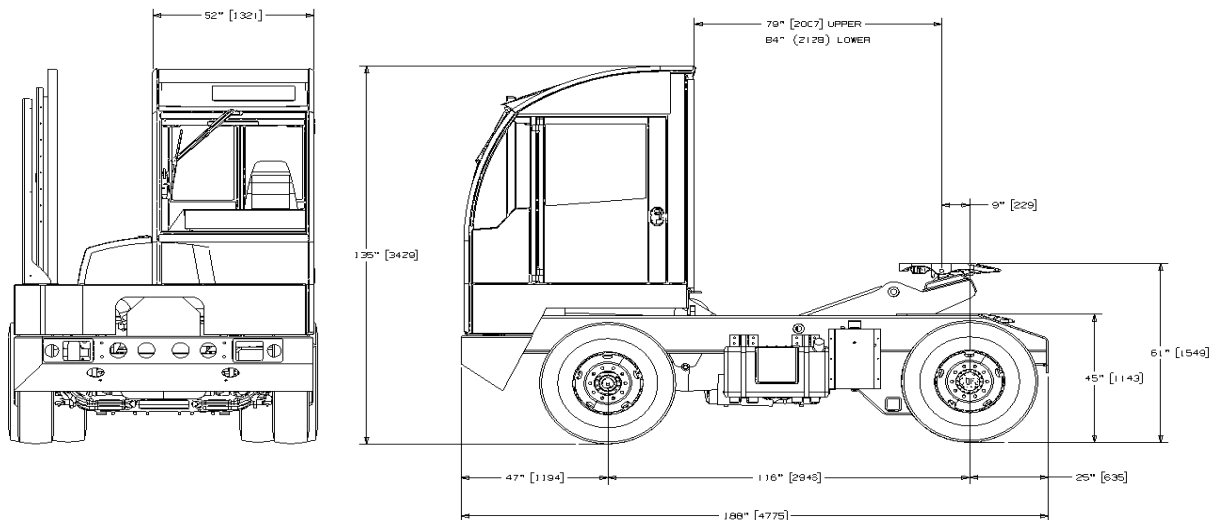

Autocar Industries, LLC • 551 South Washington Street • P.O. Box 190 • Hagerstown, IN 47346
 Toll Free: 877-973-3486 • Fax: 765-489-5230 • www.autocartruck.com